# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

James A. Schlieman
Minnesota License No. 44867

2/17/26
Date

OFFICE OF COUNTY RECORDER #247033
NORMAN COUNTY, MINNESOTA
I hereby certify that this instrument # 247033 was filed in this office for record on 2/18/2026 at 9:30 AM
County Recorder
Deputy
1 Numbered ✓ Indexed ✓ Tracted ✓ Reviewed

Return: KEPT IN ADA FILE

Fees Paid: $ 0.00 Receipt # 132574


Southwest Corner of Section 31, Township 144 N, Range 46 W 5th, P.M.
STATE OF MINNESOTA, County of NORMAN
At the corner location shown on the sketch:

☒ On 6-27-24 (Date) found a 5/8" rebar with an orange cap RLS 43807

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 1-13-26 (Date) placed a 2" aluminum cap bearing LS 44867 on top of found rebar

## SKETCH OF REFERENCE TIES

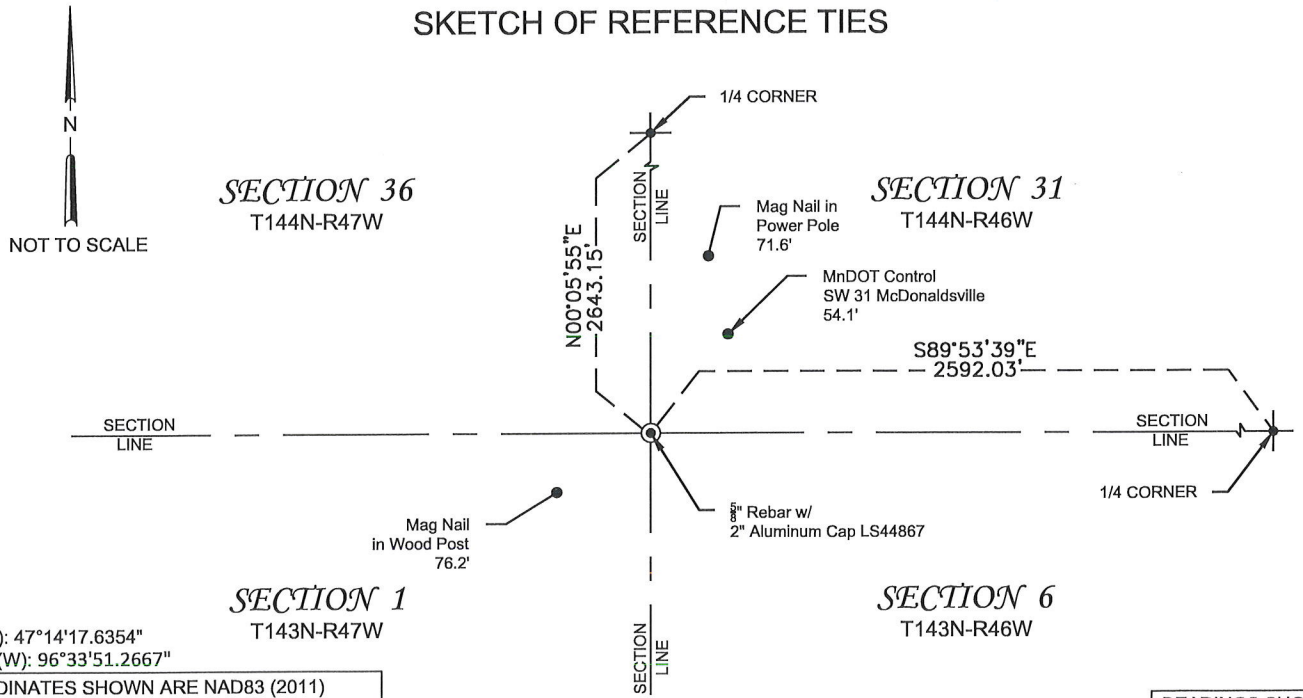


LAT (N): 47°14'17.6354"
LONG (W): 96°33'51.2667"

COORDINATES SHOWN ARE NAD83 (2011) NORMAN COUNTY COORDINATES.
SURVEY CONTROL USED: MNDOT VRS SYSTEM
N: 132,002.084
E: 471,619.364

BEARINGS SHOWN ARE BASED ON THE NORMAN COUNTY COORDINATE SYSTEM

Statement of evidence relative to this corner location is on back of page.

Statement of Evidence:

Southwest Corner of Section 31 , Township 144 N , Range 46 W 5th , P.M.

The corner was established in August, 1859 by Oscar Taylor, as part of the original public land survey.

On September 26, 1989, a Houston Engineering, Inc. survey crew found a $\frac{5}{8}$" rebar at the corner location. After consideration of all available evidence, the found rebar was accepted as marking the perpetuated location of the corner.

On December 22, 2014, Moore Engineering completed a survey that indicates an "iron monument set and marked with Land Surveyor No. 43807" for the corner.

On May 4, 2020, a Houston Engineering, Inc. survey crew found an iron monument with a cap stamped LS 43807 at the corner location. Distances to adjacent corners shown in field notes are consistent with observed distances between the same corners today.

On June 17, 2024, under the direction of James A. Schlieman, a Houston Engineering, Inc. survey crew found a $\frac{5}{8}$" rebar with an orange plastic cap stamped LS 43807 at the corner location. The location of the found rebar agrees with the historical found rebar from the 1989 Houston Engineering survey. After consideration of all available evidence, the found rebar was accepted as marking the perpetuated location of the corner.

On January 13, 2026, a Houston Engineering, Inc. survey crew found a rebar and orange plastic cap stamped LS 43807 approximately 6" below the surface at the intersection of gravel roads. The found rebar was accepted as marking the location of the corner. As part of a state remonumentation grant program, a 2" aluminum cap stamped LS 44867 was placed on the found rebar to perpetuate the corner location.